


Scoring blades

10RA19


Scoring saw blades with straight teeth and conical sides (RA). Manufactured with Long-life carbide tips



D	B	b	z	£
80	3.0-4.0	2.2	10	60.40
90	3.2-4.4	2.2	20	65.63
100	3.2-4.4	2.2	20	73.84
105	3.2-4.4	2.2	20	73.84
120	3.2-4.4	2.2	20	76.41
120	3.5-4.5	3.2	20	94.34
120	4.4-5.4	3.2	20	95.94
125	3.2-4.4	2.2	20	78.64
125	3.5-4.5	2.5	20	94.34
125	4.4-5.4	3.2	20	95.94
140	3.1-4.2	2.2	32	102.61
150	3.2-4.2	2.2	24	106.51
150	4.4-5.4	3.2	24	106.82
160	3.5-4.5	3.5	24	106.82
160	4.4-5.4	3.2	24	108.29
160	4.8-5.8	3.5	24	117.38
175	4.4-5.4	3.2	28	115.17
175	4.8-5.8	3.5	28	117.56
180	3.5-4.5	2.5	28	120.67
180	4.4-5.4	3.2	28	121.90
180	4.8-5.8	3.5	28	125.12
200	3.2-4.4	2.2	32	134.11
200	4.4-5.4	3.2	32	136.34
200	4.8-5.8	3.5	32	141.08
215	4.4-5.4	3.2	42	139.48
280	4.8-5.8	3.5	72	245.96
300	4.4-5.4	3.2	48	185.52
300	4.8-5.8	3.5	48	208.01

10RA/BA


Scoring saw blade with alternately bevelled teeth with conical sides (RABA) Manufactured with Long-life carbide tips.

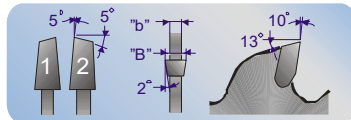

D	B	b	z	£
280	4.8-5.8	3.5	72	245.96
300	4.4-5.4	3.2	48	185.52
300	4.8-5.8	3.5	48	208.01

SPLIT SCORERS

Adjustable to suit the kerf of the main saw blade. Straight teeth (AA). Shims are included.




80	2.8-3.6	2x10		103.91
100	2.8-3.6	2x12		103.91
105	2.8-3.6	2x12		114.29
120	2.8-3.6	2x12		114.29
125	2.8-3.6	2x12		114.29
140	2.8-3.6	2x14		120.43

SPLIT SCORER for the Altendorf Rapido machine. Blade has 50mm bore and 4 Counter-sunk pin holes

D	B	z	£
120	2.8-3.6	2x12	128.31

[rpm] Recommended speed of revolution

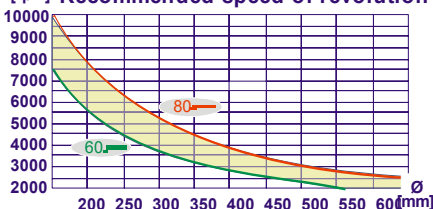

ring saw blades equipped with long-life carbide tips. Used for coring of laminated and non-coated boards.

