

Special blades for window/UPVC industry

N2AAM6	Elumatec		D	B	b	z	£
N2AAM9	V-notch		200	2.2	1.4	100	201.92
			250	2.2	1.5	126	256.40
			400	4.0	3.2	146	307.28

5AAM8	V-notch as above		D	B	b	z	£
			254	3.4	2.6	100	251.50

N5CA/DA10 AND N5CA/DA15	Trim saw blades		D	B	b	z	£
			95	2.0	1.4	20	102.75
			98	2.0	1.4	30	118.67
			103	2.0	1.4	24	118.67
			103	2.0	1.4	42	123.92
		113.4	2.25	1.4	30	129.84	

N2EAM8	Haffner machines		D	B	b	z	£
			175	2.1	1.3	68	152.06
			180	2.1	1.3	70	152.06


7EAM19sp	Emmegi machines		D	B	b	z	£
			650	5.0	4.4	108	916.58

10EAM24	Bombastic machines		D	B	b	z	£
			500	4.4	3.9	66	345.41

10BA10	Janser m/c c/sunk bore		D	B	b	z	£
			160	1.6	2.0	48	111.48

BLADE FACT


When cutting plastics the saw blade should be placed about 10-15 mm above the material.

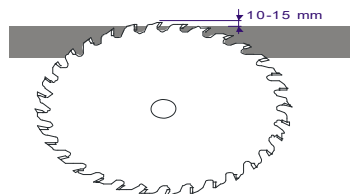

For thin, hard plastics we recommend alternately beveled teeth with chamfer (BAE).



6BAE10 For Corian &
N5BAE10 Hard plastics



For N5BAE10 hook angle should be -5*


D	B	b	z	£
250	3.2	2.2	80	132.58
300	3.2	2.2	96	153.07
350	3.5	2.5	112	188.03



Swedex manufacture blades for most applications. If you have special requirements we are happy to assist.

Radius tip blades for the window industry


N5AAR25



D	B	b	z	£
180	5.0	4.0	24	276.61
200	5.0	4.0	24	289.34
250	5.0	4.0	32	330.52
250	5.0	4.0	64	644.22

Full radius tips for Urban and Haffner corner cleaners


N2AAMR10



D	B	b	z	£
230	3.2	2.4	72	318.76

Full radius tips for Elumatic corner cleaners etc.

5AAR27



D	B	b	z	£
170	4.5	3.1	20	574.83
190	4.5	3.1	22	602.46

The tips have radius corners for Rotox machines

BLADE FACT

The steel used in our saw blades is of the highest quality. It is a spring steel hardened to give the saw body additional strength and stability.

The steel is laser cut and thereafter tempered to receive the correct hardness, depending on the application and use of the saw blade.

